

HEPA, ULPA FILTERS

ECOFIL ABS GL G H13 - U15

Applications


High-efficiency ceiling GEL type filters designed for clean rooms ceilings and clean work tables, clean rooms, microelectronics, medicine, pharma, hospitals.

Advantages

- High airflow, optimized velocity distribution
- Low pressure drop
- Guaranteed leak-free

General features

- **Frame:** ALU
- **Sealant:** Polyurethane (2-K)
- **Gasket:** Gel
- **Separator:** Hotmelt
- **Filter class: (EN1822):** H14
- **MPPS Efficiency:** ≥ 99,99%
- **Recommended final pressure drop:** 600 Pa
- **Humidity:** 100% RH
- **Temperature:** 75 °C

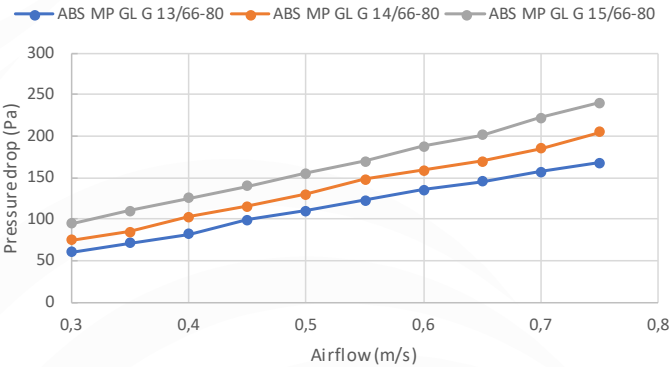

Code	Description	EN1822	Filter medium	Width (mm) A	Height (mm) B	Depth (mm) C	Area (m²)	Airflow (m³/h)	Pressure drop (Pa)
6001431	ABS MP GL G 14/33-80	H14	Glass fiber paper	305	305	80	2,4	150	125
60016824	ABS MP GL G 14/36-80	H14	Glass fiber paper	305	610	80	4,7	300	125
6001432	ABS MP GL G 14/44-80	H14	Glass fiber paper	457	457	80	5,3	340	125
6001859	ABS MP GL G 14/46-80	H14	Glass fiber paper	457	610	80	6,9	450	125
6001532	ABS MP GL G 14/66-80	H14	Glass fiber paper	610	610	80	9,4	600	125
60016804	ABS MP GL G 14/67-80	H14	Glass fiber paper	610	762	80	11,7	750	125
6001434	ABS MP GL G 14/69-80	H14	Glass fiber paper	610	915	80	14,1	900	125
6001433	ABS MP GL G 14/612-80	H14	Glass fiber paper	610	1220	80	18,8	1200	125

Other dimensions are available on request.