

FILTER CELLS



ECOFIL KA PE 40

Applications

Primary filtration for air treatment units.

General features

- **Type:** Filter cell
- **Frame:** Galvanised steel (cardboard on request)
- **Filter class ISO 16890:** Coarse 65%
- **Filter class EN779:2012:** G4
- **Recommended final pressure drop:** 250 Pa
- **Final pressure drop:** 250 Pa
- **Humidity:** 100% RH
- **Temperature:** 100°C

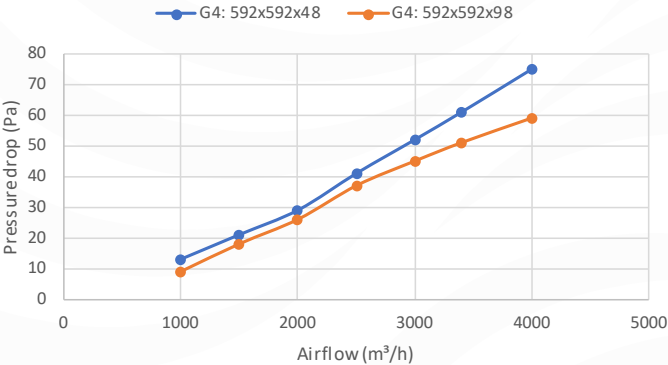

Code	Description	EN779:2012	ISO 16890	Filter medium	Width (mm) A	Height (mm) B	Depth (mm) C	Area (m²)	Airflow (m³/h)	Pressure drop (Pa)
100564	KA PE 40/55-48	G4	Coarse 65%	Polyester	592	592	48	0,59	3400	61
101021	KA PE 40/45-48	G4	Coarse 65%	Polyester	490	592	48	0,53	2800	61
100134	KA PE 40/25-48	G4	Coarse 65%	Polyester	287	592	48	0,30	1700	61
101369	KA PE 40/22-48	G4	Coarse 65%	Polyester	287	287	48	0,14	800	61
100029	KA PE 40/55-98	G4	Coarse 65%	Polyester	592	592	98	0,83	3400	51
100811	KA PE 40/45-98	G4	Coarse 65%	Polyester	490	592	98	0,71	2800	51
100030	KA PE 40/25-98	G4	Coarse 65%	Polyester	287	592	98	0,47	1700	51
100031	KA PE 40/22-98	G4	Coarse 65%	Polyester	287	287	98	0,23	800	51

Other dimensions are available on request.